

## HighPROTEC | PROT

PROTECTION TECHNOLOGY MADE SIMPLE

MRI4 | COMBINED NON-DIRECTIONAL OVERCURRENT AND EARTH-FAULT RELAY

► Configurable SCADA protocols:

► Improved design of the PC tools

Modbus, Profibus, IEC 60870-5-103/-104, DNP3

All HighPROTEC devices have been type tested and certified by KEMA Laboratories (IEC 60255-1:2009).

#### **APPLICATION**

The MRI4 is a protection relay which uses the latest Dual-Core-Processor Technology to provide precise and reliable protective functions and is very easy to operate. The MRI4 provides a number of three phase protection elements to safeguard against overcurrent, short-circuit and earth fault, all with inverse time (INV) and definite time (DEFT) tripping characteristics. The MRI4 is also ideal for the protection of isolated, resonant, resistive and solidly earthed neutral systems. It is designed to be used in both radial networks and single fed open ring main systems. It can also serve as backup protection for differential protection systems on generators, transformers, bus bars and electrical lines. For overhead line protection the MRI4 is also available with an optional auto reclosing function.

The protection functions of the MRI4 have been adapted to comply with the requirements of the VDE-AR-N-4110:2018.

#### **ALL INCLUSIVE:**

- All protection features without extra charge
- Parameter setting and evaluation software
- Disturbance record analysis software

## SIX ELEMENTS PHASE OVER-CURRENT PROTECTION (1)

- Non-directional overcurrent/shortcircuit protection (DMT/IMDT)
- Tripping characteristics: DEFT

ANSI: MINV , VINV, EINV IEC: NINV, VINV, LINV, EINV Thermal Flat, IT, I2T, I4T

# FOUR ELEMENTS EARTH FAULT PROTECTION (2)

- Non-directional earth fault protection (DEFT/INV)
- Tripping characteristics: DEFT

ANSI: MINV , VINV, EINV IEC: NINV, VINV, LINV, EINV Thermal Flat, IT, I2T, I4T RXIDG

▶ Wattmetric Ground Fault Protection

## **POWER QUALITY**

► THD protection

## DEMAND MANAGEMENT/ PEAK VALUES

 Current (peak values) and average current

#### **SUPERVISION**

- Current transformer supervision
- Circuit breaker failure protection

- ► Trip circuit supervision
- Cold load pickup
- ► Switch onto fault

#### **ADDITIONAL HIGHLIGHTS**

- ➤ Two Elements Unbalanced Load Protection
- Automatic reclosing
- ► Inrush
- ► Thermal replica
- Plausibility checks
- Adaptive parameter sets
- Status display
- Comprehensive RMS and DFT measured values and statistics
- Masking of unused functions
- ► Multi-Password-Level

#### **RECORDERS**

- ► Disturbance recorder: 120 s non volatile
- ► Fault recorder: 20 faults
- ► Event recorder: 300 events
- Trend recorder: 4000 non volatile entries

#### **PC TOOLS**

- Setting and analyzing software
   Smart view for free
- Including page editor to design own Control pages
- SCADApter to re-assign datapoints for Retrofit projects: Modbus, Profibus, IEC 60870-5-103/ -104

#### **CONTROL**

- ▶ 1 breaker
- ► Breaker wear

#### **COMMISSIONING SUPPORT**

USB connection



- Customizable Display (Single-Line)
- Customizable Inserts
- Copy and compare parameter sets
- Configuration files are convertible
- Forcing and disarming of output relays
- ► Integrated fault simulator
- Graphical display of tripping characteristics
- ▶ 8 languages selectable within the relay

#### **COMMUNICATION OPTIONS**

- ► IEC 61850
- Profibus DP
- ► Modbus RTU and/or Modbus TCP
- ► IEC 60870-5-103
- ► IEC 60870-5-104
- ► DNP 3.0 (RTU, TCP, UDP)
- ► SCADApter

#### **CYBER SECURITY**

- Menu for the activation of security settings (e. g. hardening of interfaces)
- Security Logger
- Centralized Security Logs (Syslog)
- ► Encrypted Connection Smart view –

  Device
- Device specific certificates (No man in the middle attacks)

## LOGIC

 Up to 80 logic equations for protection, control and monitoring

#### TIME SYNCHRONISATION

► SNTP, IRIG-B00X, Modbus, DNP 3.0, IEC 60870-5-103/-104

(1) DFT, True RMS or I2 based (2) DFT or True RMS based

## **FUNCTIONAL OVERVIEW**

	Elements	ANSI
Protective Functions		
I, time overcurrent and short circuit protection, multiple reset options (instantaneous, definite time, reset characteristics according to IEC and ANSI)	6	50P, 51P, 67P
Negative phase sequence overcurrent protection		51Q
12>, unbalanced load protection with evaluation of the negative phase sequence currents	2	46
ThA, overload protection with thermal replica and separate pick-up values for alarm and trip functions	1	49
IH2/In, inrush detection with evaluation of the 2nd harmonic	1	Inrush
IG, earth overcurrent and short circuit protection	4	50N/G, 51N/G
AR, automatic reclosing	1	79
ExP, External alarm and trip functions	4	


## **Control and Logic**

Control, Position indication, supervision time management and interlockings for 1 breaker

Logic: Up to 80 logic equations, each with 4 inputs, selectable logical gates, timers and memory function


Supervision Functions		
CBF, circuit breaker failure protection	1	50BF
TCS, trip circuit supervision	1	74TC
CTS, current transformer supervision	1	60L
CLPU, cold load pickup	1	
SOTF, switch onto fault	1	
Demand management and peak value supervision		
THD supervision		
Breaker wear with programmable wear curves		
Recorders: Disturbance recorder, fault recorder, event recorder, trend recorder		

## **DIMENSIONS OF THE DEVICE VARIANT FOR DOOR MOUNTING**

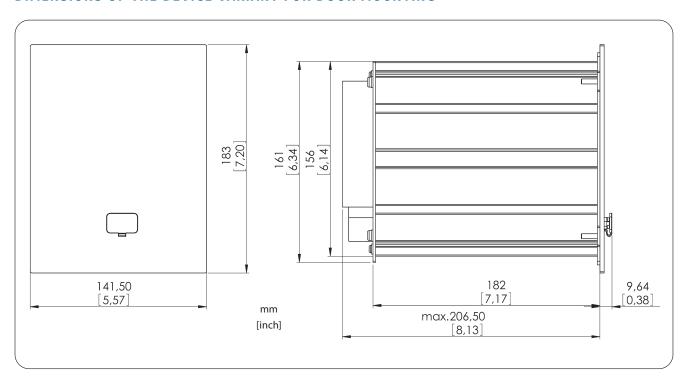



## **FUNCTIONAL OVERVIEW IN ANSI / IEEE C37.2 FORM**

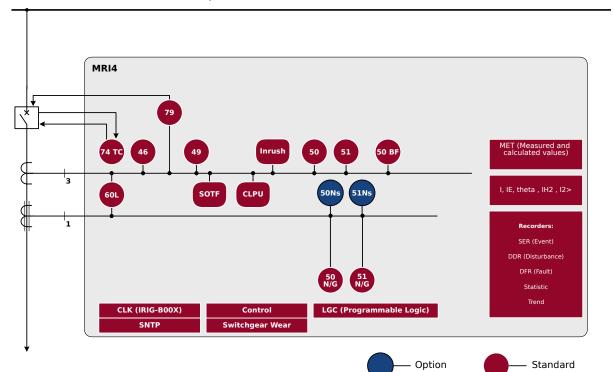

## **APPROVALS / STANDARDS**





certified regarding UL508 (Industrial Controls)



certified regarding CSA-C22.2 No. 14 (Industrial Controls)



certified by EAC (Eurasian Conformity)




Type tested and certified by KEMA Laboratories in accordance with the complete type test requirements of IEC 60255-1:2009.



KESCO 동일성 선언서 (Declaration of Identity)

Complies with "Engineering Recommendation G99 Issue 1 Amendment 6 - March 2020". Complies with IEEE 1547-2003. Amended by IEEE 1547a-2014. Complies with ANSI C37.90-2005.

## **CONNECTIONS (EXAMPLE)**

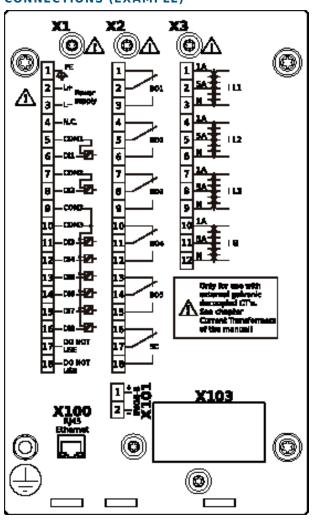



#### **ORDER FORM MRI4**

Version 2 v	with USB, enhance	d communication	n and user options				Г
Digital Inputs	Binary output relays	Housing	Large display				
8	6	B1	-		Α		
Hardware	variant 2						
Phase Curr	rent 5 A/1 A, Grou	nd Current 5 A/1	Α		0		
Phase Curr	ent 5 A/1 A, Sensit	ive Ground Curre	ent 5 A/1 A		1		
Housing a	and mounting						
Housing su	uitable for door mo	ounting				A	
Housing su	uitable for 19" rack	mounting **				В	
Communi	cation protocol						
Without pr	rotocol					Α	
Modbus R⁻	TU, IEC60870-5-10	3, DNP3.0 RTU   <i>R</i> :	S485/terminals			B*	
Modbus TO	CP, DNP3.0 TCP/UD	P, IEC60870-5-104	4   Ethernet 100 MB/1	RJ45		C*	
Profibus-D	P   optic fiber/ST-co	nnector				D*	
	P   RS485/D-SUB					E*	
			ptic fiber/ST-connect	ror		F*	
	TU, IEC60870-5-10					G*	
			0870-5-104   Ethern	et 100MB/RJ45		H*	
	5-103, Modbus RTU		RS485/terminals 14   Ethernet 100 MB,	/D IAE		*	
				ראיאס   Ethernet 100MB/LC dup	lay cannac	tor K*	
				00MB/LC duplex connect		101 K	
	5-103, Modbus RTI			oomb/LC duplex connect	OI .	L	
			50870-5-104   <i>Etheri</i>	net 100 MB/RJ45		T*	
Harsh Env	vironment Optio	n	·				_
None							
Conformal	Coating						
Available	menu language:	(in every devic	:e)				
English / G							

 $^{st}$  Within every communication option only one communication protocol is usable.

Smart view can be used in parallel via the Ethernet interface (RJ45).

The parameterizing- and disturbance analyzing software Smart view is included in the delivery of HighPROTEC devices.

Current inputs4 (1 A and 5 A) with automatic CT DisconnectDigital InputsSwitching thresholds adjustable via software

**Power supply** Wide range power supply

 $24 V_{DC} - 270 V_{DC} / 48 V_{AC} - 230 V_{AC} (-20/+10\%)$ 

**Terminals** All terminals plug type

**Type of enclosure** IP54

Dimensions of housing 19" flush mounting:  $141.5 \text{ mm} \times 173 \text{ mm} \times 208 \text{ mm}$  (W x H x D) 5.571 in.  $\times$  6.811 in.  $\times$  8.228 in.

Door mounting: 141.5 mm × 183 mm × 208 mm

141.5 min × 165 min × 206 min

5.571 in. × 7.205 in. × 8.228 in.

Weight (max. components) approx. 2.4 kg / 5.29 lb



https://docs.SEGelectronics.de/hpt-2

## **CONTACT:**

#### **SEG Electronics GmbH**

Krefelder Weg 47 D-47906 Kempen (Germany) P.O.Box 10 07 55 D-47884 Kempen (Germany)

#### Sales

Telephone

+49 (0) 21 52 145 331

Telefax

+49 (0) 21 52 145 354

E-Mail

sales@SEGelectronics.de

#### **Service & Support**

Telephone

+49 (0) 21 52 145 614

Telefax

+49 (0) 21 52 145 354

E-Mail

support@SEGelectronics.de

#### For distributor information, visit

http://www.SEGelectronics.de

For more information please contact:

© SEG Electronics GmbH www.SEGelectronics.de All Rights Reserved | 11/2020